

Warn others of your vehicle's presence by attaching a Heavy Duty Telescoping Pole FLAGSTAFF™ Warning Whip to the hitch mount on your off-road vehicle. These adjustable-length whips, with options that extend to 10, 13, 15, and 21 ft, are divided into sections that are connected by Cam-Locks. To adjust the whip length, simply flip the handle up on the Cam-Lock to loosen, extend the section(s) to desired length, and then flip down the handle on the Cam-Lock to tighten. This easy-to-use systems allows you to quickly remove a whip and break it down into a manageable size that can be easily stored in a vehicle.

With either High-Vis flag or flag and light, these warning whips provide easy identification of other vehicles, equipment, and important sites in your area. FLAGSTAFF Telescoping Pole Industrial Series feature a painted white fiber glass pole that protects against fiber blown and a heavy duty orange flag with a white Reflexite X. This system requires a Hitch Mount for vehicle attachment. Optional lighted models feature lamp socket, internal coiled electrical wiring for easy extension and collapse capabilities, and a heavy duty, easy-lock hot plug with 6" pigtail for power connection. Various lighting options available as accessories.



TELESCOPING POLE WHIPS WITH LIGHTS *(All lighted models include heavy duty, easy lock hot plug with 6" pigtail.)*

MODEL	FLAG SHAPE	DESCRIPTION
10 Foot Telescoping Pole Lighted Whip Options (3 sections)		
TPCWHP10XL-16-0	<input checked="" type="checkbox"/>	Telescoping Pole with 10 ft. White Rod, Coiled Wire Power Cord, Hot Plug, 16" x 16" Orange Flag, & White Reflexite X (Collapsed Overall Length: 77")
TPCWPC10XL-16-0	<input checked="" type="checkbox"/>	Telescoping Pole with 10 ft. White Rod, Coiled Wire Power Cord, 7-way Plug, 16" x 16" Orange Flag, & White Reflexite X (Collapsed Overall Length: 77")
13 Foot Telescoping Pole Lighted Whip Options (3 sections)		
TPCWHP13XL-16-0	<input checked="" type="checkbox"/>	Telescoping Pole with 13 ft. White Rod, Coiled Wire Power Cord, Hot Plug, 16" x 16" Orange Flag, & White Reflexite X (Collapsed Overall Length: 92")
TPCWPC13XL-16-0	<input checked="" type="checkbox"/>	Telescoping Pole with 13 ft. White Rod, Coiled Wire Power Cord, 7-way Plug, 16" x 16" Orange Flag, & White Reflexite X (Collapsed Overall Length: 92")
15 Foot Telescoping Pole Lighted Whip Options (3 sections)		
TPCWHP15XL-16-0	<input checked="" type="checkbox"/>	Telescoping Pole with 15 ft. White Rod, Coiled Wire Power Cord, Hot Plug, 16" x 16" Orange Flag, & White Reflexite X (Collapsed Overall Length: 94")
TPCWPC15XL-16-0	<input checked="" type="checkbox"/>	Telescoping Pole with 15 ft. White Rod, Coiled Wire Power Cord, 7-way Plug, 16" x 16" Orange Flag, & White Reflexite X (Collapsed Overall Length: 94")
21 Foot Telescoping Pole Lighted Whip Options (3 sections)		
TPCWHP21XL-16-0	<input checked="" type="checkbox"/>	Telescoping Pole with 21 ft. White Rod, Coiled Wire Power Cord, Hot Plug, 16" x 16" Orange Flag, & White Reflexite X (Collapsed Overall Length: 118")
TPCWPC21XL-16-0	<input checked="" type="checkbox"/>	Telescoping Pole with 21 ft. White Rod, Coiled Wire Power Cord, 7-way Plug, 16" x 16" Orange Flag, & White Reflexite X (Collapsed Overall Length: 118")



Easy-to-use Cam-Locks

For lighted models, please choose either Traditional Lens, Rocket Super Bright LEDs, or Glo-Worm Lights from Page 38.

TELESCOPING POLE WHIPS WITHOUT LIGHTS

MODEL	FLAG SHAPE	DESCRIPTION
Non-Powered Telescoping Pole Whip Options (3 sections)		
TP10X-16-0	<input checked="" type="checkbox"/>	Telescoping Pole with 10 ft. White Rod, Non-Powered, 16" X 16" Orange Flag, & White Reflexite X (Collapsed Overall Length: 68")
TP13X-16-0	<input checked="" type="checkbox"/>	Telescoping Pole with 13 ft. White Rod, Non-Powered, 16" X 16" Orange Flag, & White Reflexite X (Collapsed Overall Length: 92")
TP15X-16-0	<input checked="" type="checkbox"/>	Telescoping Pole with 15 ft. White Rod, Non-Powered, 16" X 16" Orange Flag, & White Reflexite X (Collapsed Overall Length: 92")
TP21X-16-0	<input checked="" type="checkbox"/>	Telescoping Pole with 21 ft. White Rod, Non-Powered, 16" X 16" Orange Flag, & White Reflexite X (Collapsed Overall Length: 116")

ACCESSORIES FOR TELESCOPING POLE WHIPS

MODEL	DESCRIPTION
TP7015	Telescoping Pole 2" Hitch Mount Assembly (Non-Powered)
TP7015PC	Telescoping Pole 2" Hitch Mount Assembly with Power Cord
TP7015PC-BU	Telescoping Pole 2" Hitch Mount Assembly with Power Cord and 107 Decibel Back-Up Alarm
TP9028	Telescoping Pole Hot Plug with Debris Cap, Mechanical Lock, & 6" Pigtail
TPFLATMOUNT	Telescoping Pole Flat Mount Bracket, Black Powder Coat with Four 1/2" Mounting Holes <i>(Does Not Include Hardware)</i>



TP9028
Hot Plug with Debris Cap and 6" Pigtail



TP7015
2" Hitch Mount (Non-Powered)



TP7015PC
2" Hitch Mount with Power Cord




TP7015PC-BU
2" Hitch Mount with Power Cord & Back-Up Alarm



TPFLATMOUNT
Flat Mount Bracket with Mounting Holes

FLAGSTAFF HEAVY DUTY WHIPS

HOT PLUGS



FS9026
Hot Plug

FS9028
Hot Plug with 6" Hot Wire Pigtail


EASY MOUNT ADAPTERS



FS7008
Easy Mount Adapter with 6" Hot Wire Pigtail

FS7008-2
Easy Mount Adapter with 6" Hot Wire and Ground Wire Pigtails

SPRING MOUNTS

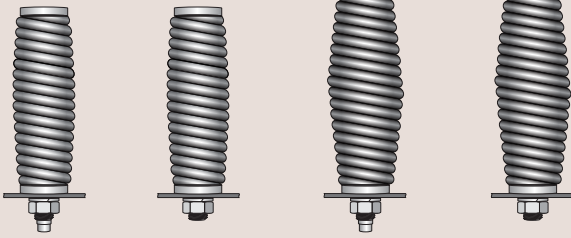


FS7006
Heavy Duty Spring Mount for Lighted Models

FS7006-DUD
Heavy Duty Spring Mount (Non-Lighted)


FS7006U
Ultra Heavy Duty Spring Mount for Lighted Models

FS7006U-DUD
Ultra Heavy Duty Spring Mount (Non-Lighted)


ASSORTED MOUNTS




FS7010
Billet, Fold-Down, Clamp Mount Bracket Available in 2 sizes




FS7012
Aluminum "L" Bracket Mount



FS7014
Billet, Fold-Down, Clamp Mount Bracket Available in 2 sizes




FS7016
Billet, Fold-Down, Tab Mount Bracket

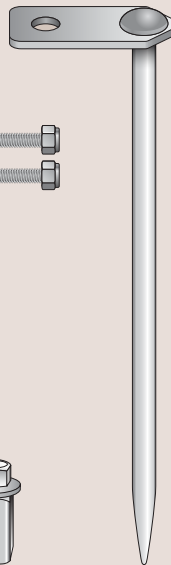

FS7050
Steel Stake Mount with Bright Zinc Finish



FS7017
12 Ga. Black Powder-Coated Steel, Flat Surface Mounting Bracket



FS7018
Steel Fire Hydrant/Flange Mount with Bright Zinc Finish

MODEL

DESCRIPTION

Hot Plugs

FS9026	Hot Plug
FS9028	Hot Plug with 6" Hot Wire Pigtail

Easy Mount Adapters

FS7008	Easy Mount Adapter with 6" Hot Wire Pigtail
FS7008-2	Easy Mount Adapter with 6" Hot Wire and Ground Wire Pigtails

Spring Mounts

FS7006	Chrome Plated Heavy Duty Spring Mount for Lighted Flagstaff's up to 8 ft.
FS7006-DUD	Chrome Plated Heavy Duty Spring Mount for Non-Lighted Flagstaff's up to 8 ft.
FS7006U	Chrome Plated Ultra Heavy Duty Spring Mount for Lighted Flagstaff's over 8 ft.
FS7006U-DUD	Chrome Plated Ultra Heavy Duty Spring Mount for Non-Lighted Flagstaff's over 8 ft.

Assorted Mounts

FS7010-1.5	Billet, Fold-Down, Clamp Mount Bracket for 1.5" Round Tubing
FS7010-1.75	Billet, Fold-Down, Clamp Mount Bracket for 1.75" Round Tubing
FS7012	Aluminum "L" Bracket Mount (Mounting Hardware Included)
FS7014-1.5	Billet, Fold-Down, Clamp Mount Bracket for 1.5" Round Tubing
FS7014-1.75	Billet, Fold-Down, Clamp Mount Bracket for 1.75" Round Tubing
FS7016	Billet, Fold-Down, Tab Mount Bracket
FS7017	12 Ga. Black Powder-Coated Steel, Flat Surface Mounting Bracket
FS7018	Steel Fire Hydrant/Flange Mount with Bright Zinc Finish
FS7050	Steel Stake Mount with Bright Zinc Finish

Magnetic Mount Bases

FS7009*	Magnetic Mount Base with Handle (For Whips without Lights)
FS7009PC*	Magnetic Mount Base with Handle and Coiled Power Cord with Lighter Plug
FS7009PCS*	Magnetic Mount Base with Handle and Coiled Power Cord with Switch on Lighter Plug

Quick Disconnect Components (see next page)

FSQD-B	Female Quick Disconnect Base Mount with Hot Plug & Debris Cap (For Whips with Male Quick Disconnect Base)
FSQD-BPT	Female Quick Disconnect Base Mount with 6" Pigtail and Debris Cap (For Whips with Male Quick Disconnect Base)
FSQDB-DUD	NON-Lighted Female Quick Disconnect Base Mount with Debris Cap (For Whips with Male Quick Disconnect Base)
FSQD-KIT	Quick Disconnect Base Mount Kit. Includes Male Quick Disconnect with Internal Threaded-Top to convert a Standard Threaded Hex Base Mount into a Male Quick Disconnect. Also includes Female Quick Disconnect Base Mount and Debris Cap.
FSQDKIT-DUD	NON-Lighted Quick Disconnect Base Mount Kit. Includes Male Quick Disconnect with Internal Threaded-Top to convert a Standard Threaded Hex Base Mount into a Male Quick Disconnect. Also includes Female Quick Disconnect Base Mount and Debris Cap.
FSQDBOOT	Quick Disconnect Urethane Protective Boot
FSQDCAP-B	Quick Disconnect Urethane Debris Cap (Used to Cover Female Quick Disconnect Base)

Hitch Mounts (see next page)

FS7015	2" Hitch Mount with Threaded Hex Base (Non-Powered)
FS7015PC	2" Hitch Mount with Threaded Hex Base and 24" Power Cord
FS7015PC-BU	2" Hitch Mount with Threaded Hex Base, 24" Power Cord and Back-Up Alarm
FS7015-QD	2" Hitch Mount with Female Quick Disconnect Base (Non-Powered)
FS7015PC-QD	2" Hitch Mount with Female Quick Disconnect Base and 24" Power Cord
FS7015PC-BU-QD	2" Hitch Mount with Female Quick Disconnect Base, 24" Power Cord and Back-Up Alarm

MAGNETIC MOUNT BASES



FS7009*
Magnetic Mount Base with Handle




FS7009PC*
Magnetic Mount Base with Handle and Coiled Power Cord with Lighter Plug




FS7009PCS*
Magnetic Mount Base with Handle and Coiled Power Cord with Switch on Lighter Plug

* Recommended for use with 3 & 5 ft. whips and are for temporary use only


FEMALE QUICK DISCONNECT BASE MOUNTS



FSQD-B
Female Quick Disconnect Base Mount with Hot Plug and Debris Cap (for lighted models)



FSQD-BPT
Female Quick Disconnect Base Mount with 6" Pigtail and Debris Cap (for lighted models)




FSQDB-DUD
Female Quick Disconnect Base Mount with Debris Cap (for non-lighted models)


NOTE:

FLAGSTAFF™ Warning Whips that utilize our Quick Disconnect System include only a Male Quick Disconnect. To complete the vehicle attachment, a Female Quick Disconnect Base Mount must be purchased separately.

QUICK DISCONNECT ACCESSORIES



FSQDCAP-B
Quick Disconnect Debris Cap




FSQD-BOOT
Quick Disconnect Protective Boot


QUICK DISCONNECT COMPONENTS

QUICK DISCONNECT BASE MOUNT KITS

Includes Male Quick Disconnect with Internal Threaded-Top to convert a Standard Threaded Hex Base Mount into a Male Quick Disconnect. Also includes Female Quick Disconnect Base Mount and Debris Cap.




FSQD-KIT
Quick Disconnect Base Mount Kit with Female/Male Components and Debris Cap (for lighted models)



FSQDKIT-DUD
Quick Disconnect Base Mount Kit with Female/Male Components and Debris Cap (for non-lighted models)


HITCH MOUNTS WITH THREADED HEX BASE




FS7015
2" Hitch Mount with Threaded Hex Base (Non-Powered)




HITCH MOUNTS WITH QUICK DISCONNECT BASE




FS7015-QD
2" Hitch Mount with Female Quick Disconnect Base (Non-Powered)




FS7015PC
2" Hitch Mount with Threaded Hex Base and 24" Power Cord



FS7015PC-QD
2" Hitch Mount with Female Quick Disconnect Base Mount and 24" Power Cord



FS7015PC-BU
2" Hitch Mount with Threaded Hex Base, 24" Power Cord and Back-Up Alarm



FS7015PC-BU-QD
2" Hitch Mount with Female Quick Disconnect Base Mount, 24" Power Cord and Back-Up Alarm



FLAGSTAFF HEAVY DUTY WHIPS

FLAGSTAFF™ Heavy Duty Warning Whips are available with a variety of lighting options.

TRADITIONAL LENS



FS7020-C



FS7020-A



FS7020-R



FS7020-B



FS7020-G

GLO-WORM™ LIGHTS



FSLED12-6-C



FSLED12-6-A



FSLED12-6-R



FSLED12-6-B



FSLED12-6-G


ROCKET™ SUPER BRIGHT LED LIGHTS (360° VISIBILITY)



FSRKT-3AF/3RF (Flashing LED)




FSRKT-6ANF (Non-Flashing LED)



FSRKT-6AF (Flashing LED)



FSRKT-6RNF (Non-Flashing LED)



FSRKT-6RF (Flashing LED)




FSRKT-6GNF (Non-Flashing LED)



FSRKT-6GF (Flashing LED)



FSRKT-6BNF (Non-Flashing LED)





FSRKT-6BF (Flashing LED)

TRADITIONAL LENS

Lens, Metal Cap, and Bulb must be ordered separately to complete Traditional Lens assembly

MODEL	COLOR	DESCRIPTION
FS7020-C	<input type="checkbox"/>	Traditional High Impact Plastic Lens Clear
FS7020-A	<input type="checkbox"/>	Traditional High Impact Plastic Lens Amber
FS7020-R	<input type="checkbox"/>	Traditional High Impact Plastic Lens Red
FS7020-B	<input type="checkbox"/>	Traditional High Impact Plastic Lens Blue
FS7020-G	<input type="checkbox"/>	Traditional High Impact Plastic Lens Green
FS9030		Lamp, 12 Volt (1156) 38CP (2.1 Amps)
FS7004		Chrome Plated Metal Lens Cap (Use with any Model 7020 Lens)

GLO-WORM LIGHTS

MODEL	COLOR	VOLT	DESCRIPTION
FSLED12-6-C	<input type="checkbox"/>	12	Glo-Worm LED Light, 6 in. Length Clear
FSLED12-6-A	<input type="checkbox"/>	12	Glo-Worm LED Light, 6 in. Length Amber
FSLED12-6-R	<input type="checkbox"/>	12	Glo-Worm LED Light, 6 in. Length Red
FSLED12-6-B	<input type="checkbox"/>	12	Glo-Worm LED Light, 6 in. Length Blue
FSLED12-6-G	<input type="checkbox"/>	12	Glo-Worm LED Light, 6 in. Length Green

ROCKET SUPER BRIGHT LED LIGHTS*

MODEL	COLOR	VOLT	DESCRIPTION
FSRKT-3AF/3RF	<input type="checkbox"/>	12-24	Super Bright Flashing LED Light (.08-25 Amps) 3 Amber/3 Red
FSRKT-6ANF	<input type="checkbox"/>	12-24	Super Bright Non-Flashing LED Light (.08-25 Amps) 6 Amber
FSRKT-6AF	<input type="checkbox"/>	12-24	Super Bright Flashing LED Light (.08-25 Amps) 6 Amber
FSRKT-6RNF	<input type="checkbox"/>	12-24	Super Bright Non-Flashing LED Light (.08-25 Amps) 6 Red
FSRKT-6RF	<input type="checkbox"/>	12-24	Super Bright Flashing LED Light (.08-25 Amps) 6 Red
FSRKT-6GNF	<input type="checkbox"/>	12-24	Super Bright Non-Flashing LED Light (.08-25 Amps) 6 Green
FSRKT-6GF	<input type="checkbox"/>	12-24	Super Bright Flashing LED Light (.08-25 Amps) 6 Green
FSRKT-6BNF	<input type="checkbox"/>	12-24	Super Bright Non-Flashing LED Light (.08-25 Amps) 6 Blue
FSRKT-6BF	<input type="checkbox"/>	12-24	Super Bright Flashing LED Light (.08-25 Amps) 6 Blue

▶ *See flashing lights in action at checkersindustrial.com!





EXTRA HEAVY DUTY GORILLA-STRENGTH

FLAGSTAFF POWER WHIPS


Flagstaff™ Gorilla-Strength Power Whips are the newest addition to our Flagstaff Warning Whips product line. These flexible white fiberglass whips are available in 3, 5, 6, 8, 10 or 12 foot lengths and include a heavy duty orange, green, or yellow flag and mounting base for vehicle attachment. Various interchangeable lighting and mounting options are available as accessories. The optional ultra heavy duty spring is engineered to provide firm vertical support to the whip at higher vehicle speeds than standard spring mounts.

To prevent deterioration, a weather-resistant, polyolefin heat-shrink tubing is used to seal the interchangeable lamp and socket to prevent moisture, chemicals, and debris from contacting electrical connectors. The hex base is also sealed to provide additional protection.

For improved durability, Flagstaff™ Gorilla-Strength Power Whips feature a high quality, continuous power cable that extends from the lamp through the hex base and optional ultra heavy duty spring mount. This eliminates pinched wires, multiple solder joints, and hot plug power connections - all of which can cause failure due to corrosion. The custom designed power cable is molded into the whip and consists of 2 conductor, 20 AWG, 19 x 32 strand, triple-coated thermoplastic elastomer (TPE) insulation and features a cold temperature rating of -75° C/-103° F.


Flagstaff™ Gorilla-Strength Power Whips have a weather-shield coating of a two-part polyurethane, enamel paint finish to help protect against fiberglass deterioration such as fiber bloom or exposed fiberglass slivers.

Flagstaff™ Gorilla-Strength Power Whips can be ordered completely assembled, with or without spring and lamp, and ready for installation.

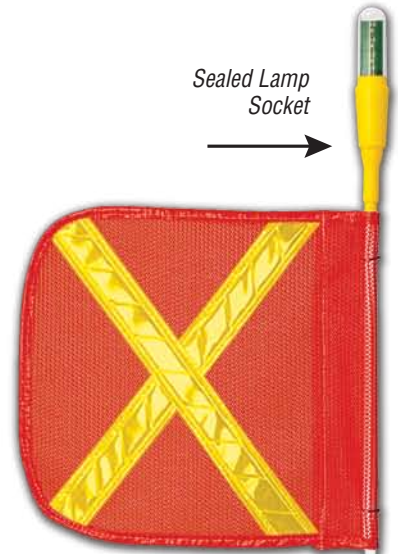


Sealed Lamp Socket

Continuous power cable extends from the lamp through the entire whip and exits through the hex base or optional spring mount.

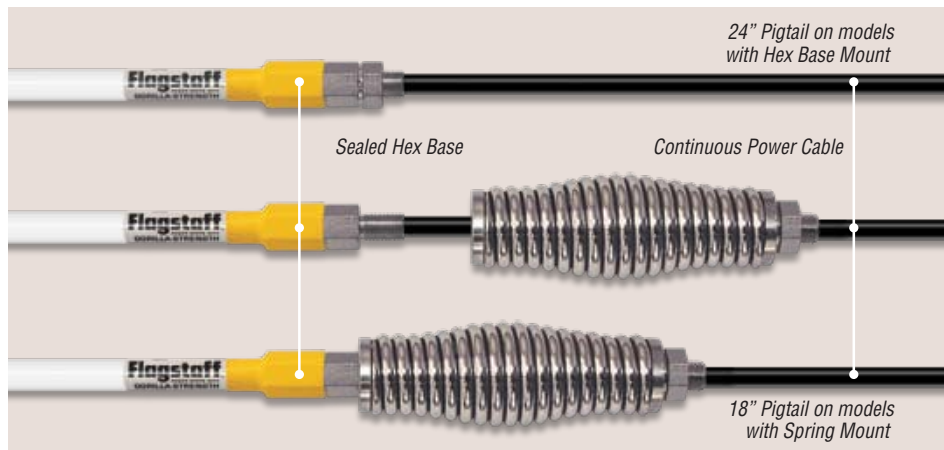

Flagstaff™ Gorilla-Strength Power Whips feature a custom designed, continuous power cable that extends from the lamp through the hex base and optional ultra heavy duty spring mount, which eliminates pinched wires, multiple solder joints, and hot plug power connections that can cause failure due to corrosion. This cable is molded into the whip and features a cold temperature rating of -75° C/-103° F.

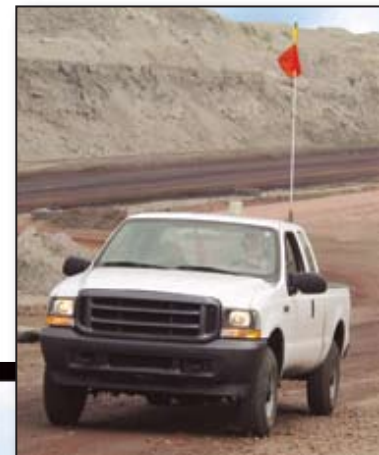

FEATURES

- Available in 3, 5, 6, 8, 10 or 12 foot lengths
- Completely sealed lamp, socket, and hex base prevent deterioration
- High quality, continuous power cable from lamp through hex base and optional ultra heavy duty spring mount
- Triple-coated thermoplastic elastomer (TPE) insulated power cable
- -75° C/-103° F temperature rating of power cable
- Weather-shield polyurethane enamel paint finish to help protect against fiberglass deterioration such as fiber bloom or exposed fiberglass slivers.
- Optional ultra heavy duty spring provides increased vertical support at higher speeds
- Interchangeable light options
- Order completely assembled and ready for installation

BUILD YOUR OWN WHIP!

These whips are part of our "Build Your Whip" program so you can order all components to fit your exact needs!


See page 41 to order!



HIGH VISIBILITY INTERCHANGEABLE LIGHT OPTIONS FOR GORILLA-STRENGTH WHIPS


Flagstaff™ Gorilla-Strength Power Whips are available with a variety of interchangeable, weather-resistant lighting options, all of which include a polyolefin heat-shrink tubing around the base of the lamp to prevent moisture, chemicals, and debris from contacting the electrical connections.

ROCKET™ SUPER BRIGHT LED LIGHTS (360° VISIBILITY)




8

GSRKT-6AF (Flashing LED)




9

GSRKT-6ANF (Non-Flashing LED)




10

GSRKT-6RF (Flashing LED)



11

GSRKT-6RNF (Non-Flashing LED)



12

GSRKT-6GF (Flashing LED)



13

GSRKT-6GNF (Non-Flashing LED)



14

GSRKT-3AF/3RF (Flashing LED)



20

GSRKT-6BF (Flashing LED)



21

GSRKT-6BNF (Non-Flashing LED)

GLO-WORM™ LIGHTS



15

GSLED12-6-C



16

GSLED12-6-A



17

GSLED12-6-R



18

GSLED12-6-B



19

GSLED12-6-G

= Build Your Own Whip Reference Number


ROCKET SUPER BRIGHT LED LIGHTS* WITH HEAT-SHRINK TUBING

MODEL	COLOR	VOLT	DESCRIPTION
GSRKT-6ANF	Amber	12-24	Super Bright Non-Flashing LED Light (.08-.25 Amps) 6 Amber
GSRKT-6AF	Amber	12-24	Super Bright Flashing LED Light (.08-.25 Amps) 6 Amber
GSRKT-6RNF	Red	12-24	Super Bright Non-Flashing LED Light (.08-.25 Amps) 6 Red
GSRKT-6RF	Red	12-24	Super Bright Flashing LED Light (.08-.25 Amps) 6 Red
GSRKT-6GNF	Green	12-24	Super Bright Non-Flashing LED Light (.08-.25 Amps) 6 Green
GSRKT-6GF	Green	12-24	Super Bright Flashing LED Light (.08-.25 Amps) 6 Green
GSRKT-6BNF	Blue	12-24	Super Bright Non-Flashing LED Light (.08-.25 Amps) 6 Blue
GSRKT-6BF	Blue	12-24	Super Bright Flashing LED Light (.08-.25 Amps) 6 Blue
GSRKT-3AF/3RF	Amber/Red	12-24	Super Bright Flashing LED Light (.08-.25 Amps) 3 Amber/3 Red

▶ *See flashing lights in action at checkersindustrial.com!

GLO-WORM LIGHTS WITH HEAT-SHRINK TUBING

MODEL	COLOR	VOLT	DESCRIPTION
GSLED12-6-C	Clear	12	Glo-Worm LED Light, 6 in. Length Clear
GSLED12-6-A	Amber	12	Glo-Worm LED Light, 6 in. Length Amber
GSLED12-6-R	Red	12	Glo-Worm LED Light, 6 in. Length Red
GSLED12-6-B	Blue	12	Glo-Worm LED Light, 6 in. Length Blue
GSLED12-6-G	Green	12	Glo-Worm LED Light, 6 in. Length Green

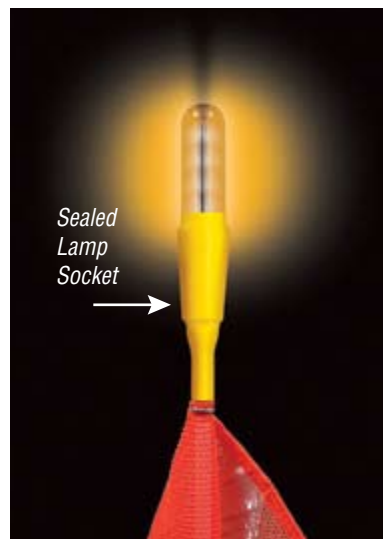

Sealed Lamp Socket

Interchangeable lamps are easy to install!

Gorilla-Strength Power Whips feature interchangeable lights so there is no need to return your whips to the factory for lamp replacement. To replace a lamp, simply:

1. Slit the heat-shrink tubing
2. Remove the old lamp
3. Install the new lamp
4. Reseal with new heat-shrink tubing, which is included with all new lamps.



OPTIONAL MOUNTING ACCESSORIES FOR GORILLA-STRENGTH WHIPS


Flagstaff™ Gorilla-Strength Power Whips are available with a variety of mounting options for sturdy vehicle attachment.

GORILLA-STRENGTH MOUNTING ACCESSORIES


MODEL	DESCRIPTION
FS7006U-DUD	Chrome Plated Ultra Heavy Duty Spring Mount for Gorilla-Strength Whips
FS7010-1.5	Billet, Fold-Down, Clamp Mount Bracket for 1.5" Round Tubing
FS7010-1.75	Billet, Fold-Down, Clamp Mount Bracket for 1.75" Round Tubing
FS7012	Aluminum "L" Bracket Mount (Mounting Hardware Included)
FS7016	Billet, Fold-Down, Tab Mount Bracket
FS7017	12 Ga. Black Powder-Coated Steel, Flat Surface Mounting Bracket




FS7006U-DUD
Ultra Heavy Duty Spring Mount with Lock Washer and Jam Nut



FS7010
Billet, Fold-Down, Clamp Mount Bracket Available in 2 sizes



FS7012
Aluminum "L" Bracket Mount



FS7016
Billet, Fold-Down, Tab Mount Bracket




FS7017
12 Ga. Black Powder-Coated Steel, Flat Surface Mounting Bracket

HIGH VISIBILITY REPLACEMENT FLAGS

FOR GORILLA-STRENGTH WHIPS


FLAGSTAFF™ HEAVY DUTY FLAGS

Nylon Mesh Pattern



MODEL	COLOR	DESCRIPTION
FS9024-O	Orange	Standard Heavy Duty, Plastic Coated, Nylon Mesh, Orange Flag, 12" w x 11" h (Mounting Clips included)
FS9025-O	White Reflexite X	Same Heavy Duty Orange Flag as FS9024 with a White Reflexite X
FS8025-O	Yellow Reflexite X	Same Heavy Duty Orange Flag as FS9024 with a Yellow Reflexite X
FS9024-16-O	Orange	Standard Heavy Duty, Plastic Coated, Nylon Mesh, Orange Flag 16" w x 16" h (Mounting Clips included)
FS9025-16-O	White Reflexite X	Same Heavy Duty Orange Flag as FS9024-16 with a White Reflexite X
FS8025-16-O	Yellow Reflexite X	Same Heavy Duty Orange Flag as FS9024-16 with a Yellow Reflexite X
FST9024-O	Orange	Triangular Heavy Duty, Plastic Coated, Nylon Mesh, Orange Flag 12" w x 9" h (Mounting Clips included)
FS9024-G	Green	Standard Heavy Duty, Plastic Coated, Nylon Mesh, Green Flag 12" w x 11" h (Mounting Clips included)
FS9025-G	White Reflexite X	Same Heavy Duty Green Flag as FS9024-G with a White Reflexite X
FS8025-G	Yellow Reflexite X	Same Heavy Duty Green Flag as FS9024-G with a Yellow Reflexite X
FS9024-16-G	Green	Standard Heavy Duty, Plastic Coated, Nylon Mesh, Green Flag 16" w x 16" h (Mounting Clips included)
FS9025-16-G	White Reflexite X	Same Heavy Duty Green Flag as FS9024-16-G with a White Reflexite X
FS8025-16-G	Yellow Reflexite X	Same Heavy Duty Green Flag as FS9024-16-G with a Yellow Reflexite X
FST9024-G	Green	Triangular Heavy Duty, Plastic Coated, Nylon Mesh, Green Flag 12" w x 9" h (Mounting Clips included)
FS9024-Y	Yellow	Standard Heavy Duty, Plastic Coated, Nylon Mesh, Yellow Flag 12" w x 11" h (Mounting Clips included)
FS9025-Y	White Reflexite X	Same Heavy Duty Yellow Flag as FS9024-G with a White Reflexite X
FS8025-Y	Yellow Reflexite X	Same Heavy Duty Yellow Flag as FS9024-G with a Yellow Reflexite X
FS9024-16-Y	Yellow	Standard Heavy Duty, Plastic Coated, Nylon Mesh, Yellow Flag 16" w x 16" h (Mounting Clips included)
FS9025-16-Y	White Reflexite X	Same Heavy Duty Yellow Flag as FS9024Y-16-Y with a White Reflexite X
FS8025-16-Y	Yellow Reflexite X	Same Heavy Duty Yellow Flag as FS9024Y-16-Y with a Yellow Reflexite X
FST9024-Y	Yellow	Triangular Heavy Duty, Plastic Coated, Nylon Mesh, Yellow Flag 12" w x 9" h (Mounting Clips included)

RECTANGULAR FLAGS BELOW ARE AVAILABLE IN 2 SIZES:

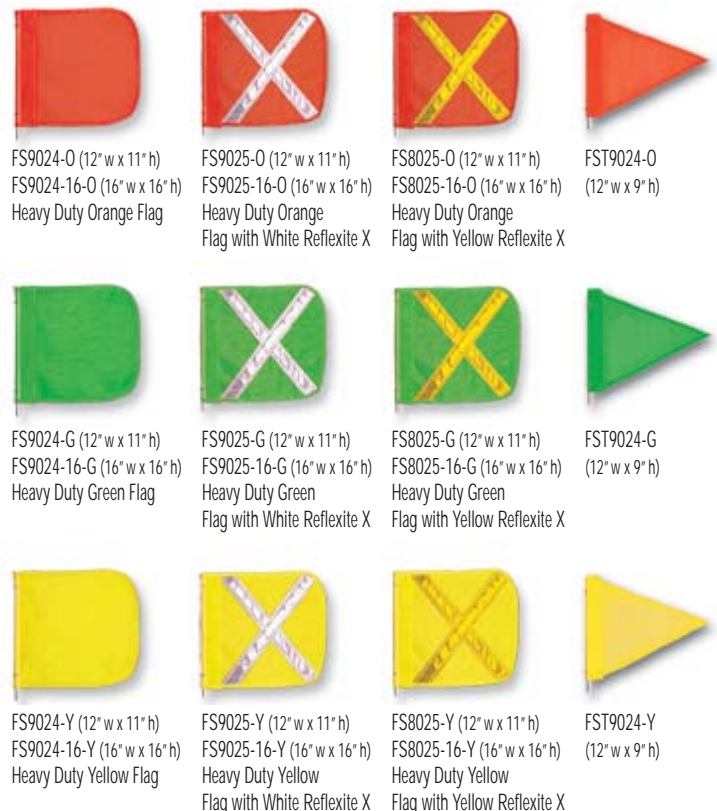


NON-LIGHTED WARNING WHIPS

The FLAGSTAFF™ Light Duty Series consists of a repairable .30 inch diameter, 7 foot flexible fiberglass whip with orange flag and threaded hex mounting base for vehicle attachment. Various whip colors are available. Various mounting options are available as accessories.

FLAGSTAFF™ LIGHT DUTY NON-LIGHTED WARNING WHIPS

MODEL	DESCRIPTION
FSRR7B-HB	BLACK 7 ft. Whip with Flag and Threaded Hex Mounting Base - No Lamp Socket
FSRR7BLU-HB	BLUE 7 ft. Whip with Flag and Threaded Hex Mounting Base - No Lamp Socket
FSRR7G-HB	GREEN 7 ft. Whip with Flag and Threaded Hex Mounting Base - No Lamp Socket
FSRR7O-HB	ORANGE 7 ft. Whip with Flag and Threaded Hex Mounting Base - No Lamp Socket
FSRR7R-HB	RED 7 ft. Whip with Flag and Threaded Hex Mounting Base - No Lamp Socket
FSRR7W-HB	WHITE 7 ft. Whip with Flag and Threaded Hex Mounting Base - No Lamp Socket
FSRR7Y-HB	YELLOW 7 ft. Whip with Flag and Threaded Hex Mounting Base - No Lamp Socket



7 Whip Colors Available!




Custom Lengths Available

LIGHT DUTY ACCESSORIES & REPLACEMENT PARTS

FLAGSTAFF™ LIGHT DUTY ACCESSORIES & REPLACEMENT PARTS



FS3007
Orange, Plastic-Coated Nylon Mesh Flag




FS3000
Compression Hex Base Mount




FS7006LD-DUD
Light Duty Spring Mount (Non-Lighted)




FS7050
Steel Stake Mount with Bright Zinc Finish




FS7010
Billet, Fold-Down, Clamp Mount Bracket Available in 2 sizes



FS7012
Aluminum "L" Bracket Mount



FS7014
Billet, Fold-Down, Clamp Mount Bracket Available in 2 sizes



FS7016
Billet, Fold-Down, Tab Mount Bracket




FS7017
12 Ga. Black Powder-Coated Steel, Flat Surface Mounting Bracket



FS7018
Steel Fire Hydrant/Flange Mount with Bright Zinc Finish

MODEL	DESCRIPTION
FS3007	Orange, Plastic-Coated Nylon Mesh Flag, 11 1/2" w x 7 1/4" h with Mounting Clips
FS3000	Compression Hex Base Mount - ONLY for Non-Lighted, Light Duty Whips
FS7006LD-DUD	Chrome Plated Light Duty Spring Mount - ONLY for Non-Lighted, Light Duty Whips up to 7 ft.
FS3009LD	Magnetic Mounting Base - ONLY for Non-Lighted, Light Duty Whips up to 7 ft.
FS7009	Magnetic Mount Base with Handle - ONLY for Non-Lighted, Light Duty Whips up to 7 ft.
FS7010-1.5	Billet, Fold-Down, Clamp Mount Bracket for 1.5" Round Tubing
FS7010-1.75	Billet, Fold-Down, Clamp Mount Bracket for 1.75" Round Tubing
FS7012	Aluminum "L" Bracket Mount (Mounting Hardware Included)
FS7014-1.5	Billet, Fold-Down, Clamp Mount Bracket for 1.5" Round Tubing
FS7014-1.75	Billet, Fold-Down, Clamp Mount Bracket for 1.75" Round Tubing
FS7016	Billet, Fold-Down, Tab Mount Bracket
FS7017	12 Ga. Black Powder-Coated Steel, Flat Surface Mounting Bracket
FS7018	Steel Fire Hydrant/Flange Mount with Bright Zinc Finish
FS7050	Steel Stake Mount with Bright Zinc Finish



FS3009LD*
Magnetic Mount Base
* Recommended for use with 7 ft. Light Duty whips and are for temporary use only



FS7009*
Magnetic Mount Base with Handle
* Recommended for use with 7 ft. Light Duty whips and are for temporary use only